

### Mechanical Characteristics

Number of cells (pcs)	60
Size of cell (mm)	156*156
Type of cell	Mono
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP67
Size of module (mm)	1650*990*35
Weight (kg)	18.6
Cables/connectors	PV1-F,4mm <sup>2</sup> , MC4 compatible

### Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

### Electrical Characteristics

STC	EG-240 M60-C	EG-245 M60-C	EG-250 M60-C	EG-255 M60-C	EG-260 M60-C
Pmax (W)	240	245	250	255	260
Vmp (V)	30.12	30.26	30.42	30.58	30.77
Imp (A)	7.97	8.10	8.22	8.34	8.45
Voc (V)	37.26	37.51	37.71	37.92	38.14
Isc (A)	8.52	8.64	8.74	8.85	8.90
Module efficiency (%)	14.7	15.0	15.3	15.6	15.9
Maximum system voltage (V)	1000				
Fuse Rating Current (A)	15				
Power tolerance (%)	0~+3				
Temperature coefficient	Pmax (%/°C)	- (0.43±0.05)			
	Isc (%/°C)	0.04±0.015			
	Voc (%/°C)	- (0.325±0.1)			

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5



NOCT	EG-240 M60-C	EG-245 M60-C	EG-250 M60-C	EG-255 M60-C	EG-260 M60-C
Pmax (W)	173.10	176.71	180.31	183.92	187.53
Vmp (V)	27.20	27.33	27.47	27.62	27.79
Imp (A)	6.36	6.47	6.56	6.66	6.75
Voc (V)	34.18	34.41	34.59	34.79	34.99
Isc (A)	6.90	6.99	7.08	7.17	7.21
Power tolerance (%)	±3%				

NOCT: Irradiance 800W/ m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

### Packing Configuration

Pieces per pallet	30
Size of packing (mm)	1690*1120*1140
Weight of packing (kg)	618
Pieces per container	840
Size of container	40' HC

### I-V Curves

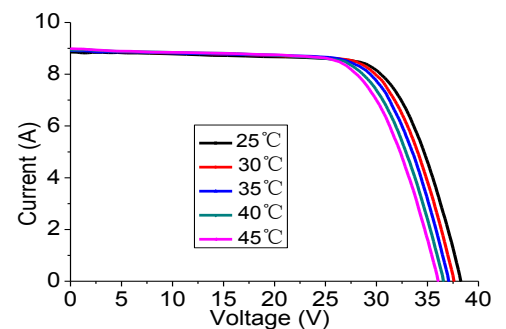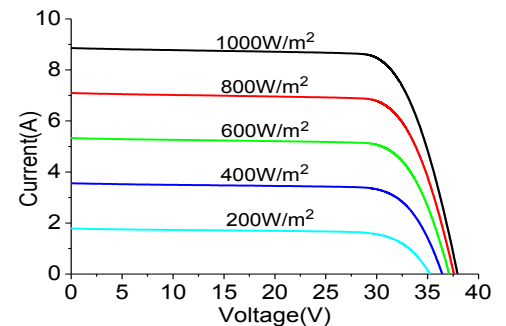

Specifications in this catalog sheet are subject to technical changes and product innovations. EGING PV reserves the right of final interpretation.